

C1 Control Console

OEM
CONTROLS

We designed the C1 Control Console to give our customers the maximum freedom of design and configuration options. The design has paid attention to a compact format, which can be extended with additional modules. The modular design allows individual assembly with joysticks, displays and command devices. The C1 Control Console is able to adapt perfectly to your product and your branding.

STANDARD COLOR:

Housing upper part: light grey RAL 7035 and anthracite RAL 7016

Housing bottom part: anthracite RAL 7016

Insert plate: anthracite RAL 7016

TECHNICAL DATA:

Operation temperature -40°C to +85°C

Horizontal adjustment +/- 30 mm



		C1	-1	-1	-1	-0	Example USB	-L1	/	Joystick Bases	/	KLS	/	X
Basic unit														
C1	Control Console 160 x 520 mm													
Insert plate														
1	Insert plate (flat) variant 1													
2	Insert plate (with recess) variant 2													
Color housing upper part														
1	Light grey RAL 7035													
2	Anthracite RAL 7016													
X	Desired color (on request!)													
Color decor stripes														
1	Red RAL 3020													
2	Green RAL 6024													
3	Blue RAL 5017													
4	Yellow RAL 1004													
X	Desired color (on request!)													
Illumination decor stripes														
0	No illumination													
1	RGB-illumination left													
2	RGB-illumination right													
3	RGB-illumination left + right													
Attachments														
USB	USB-plugin socket 2-fold, 2 x 2,5 A													
I1	Inductive charger 12/24V 15W													
L1	Logo left													
L2	Logo right													
L3	Logo left incl. lighting													
L4	Logo right incl. lighting													
E1	Extension housing right													
D1	Display holder													

Technical details may vary based on configuration or application! Technical data subject to change without notice!

C1 Control Console



Mounting for equipment boxes


V	Multi-Axis Controller
N...	Control-Switch
...	<i>More command and indicating devices</i>

Wiring

KLS	On connector or joystick per core
KLK	One side on cable per core

Special model

X	Special / customer specified
---	------------------------------

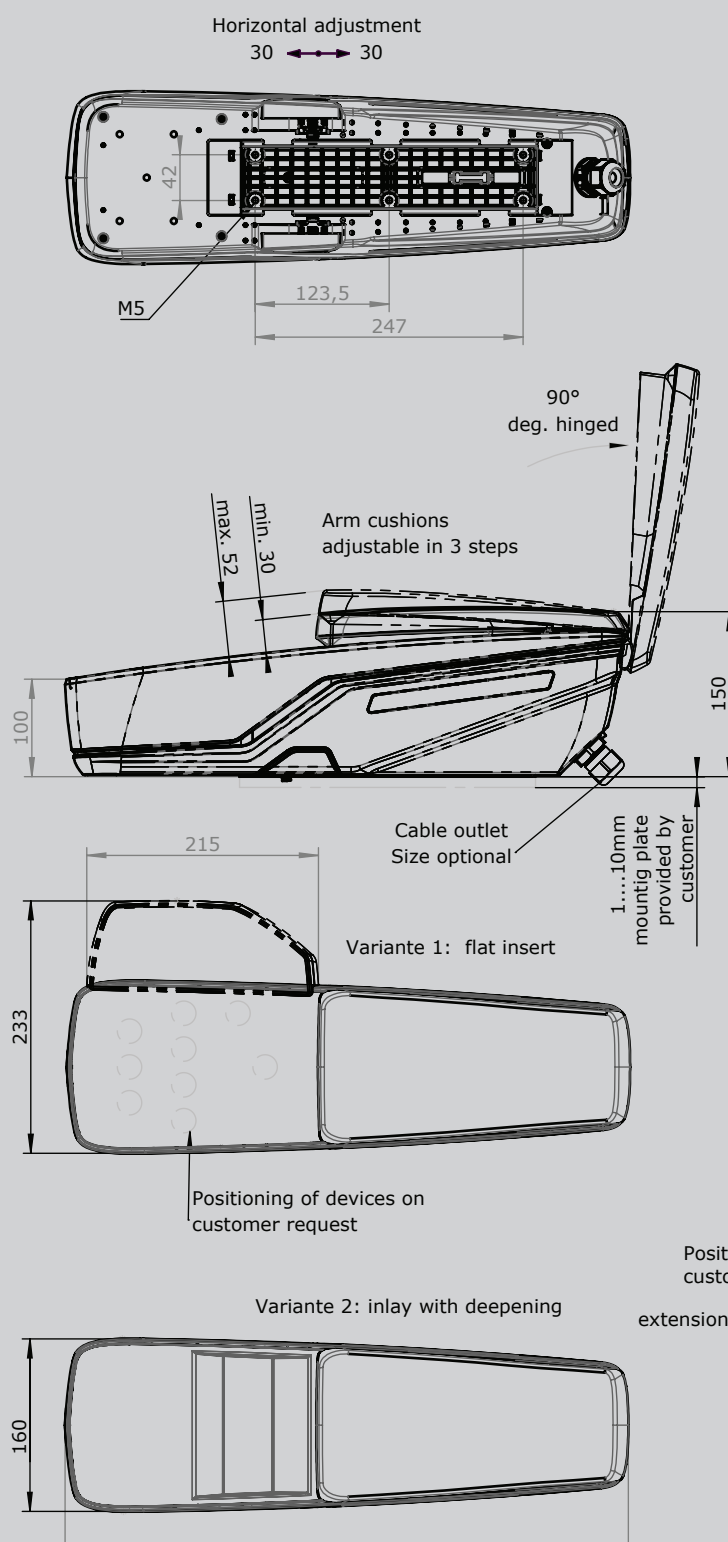

Thickness of mounting plate, provided by customer (mm)	screw for mounting plate
1	M5x10
1,5	M5x12
2	M5x12
2,5	M5x12
3	M5x12
4	M5x14
5	M5x16
6	M5x16
8	M5x18
10	M5x20

